




```

1  #include "inif.h"
2  #include <at89x52.h>
3  #include <absacc.h>
4  #include "LCD1602.H"
5
6  unsigned char data ad_result[16]={0};
7  unsigned char data dianliu_result[5]={0};
8  unsigned char bbb[] = {"CheckAD(TLC1543)" } ;//用于第二行的输出
9  float jizhun_AD=2.5;                //AD的基准电压
10 unsigned int read1543(unsigned char chn1) ;
11
12 void da5615(unsigned int *p) ;      //5615
13
14
15
16
17 /*****DAC*****/
18 float zh (float k)//浮点型！接收小数的转换。
19 {
20     float DA;
21     DA=k*1024/5; //2.5v参考电压！
22     return DA;
23 }
24
25 void DA_Conver(unsigned int DAValue)
26 {
27     unsigned char i;
28     DAValue <= 6; //原先是16位long数据：00000000+10位数据，<<6位后为（0000+10位数据+00）
29     CS_DA = 0;
30     SPI_CLK = 0;                // 在以下12个时钟周期内，每当在上升沿的
31                                // 数据被锁存,形成DA输出。
32     for(i = 0; i < 12; i++)

```

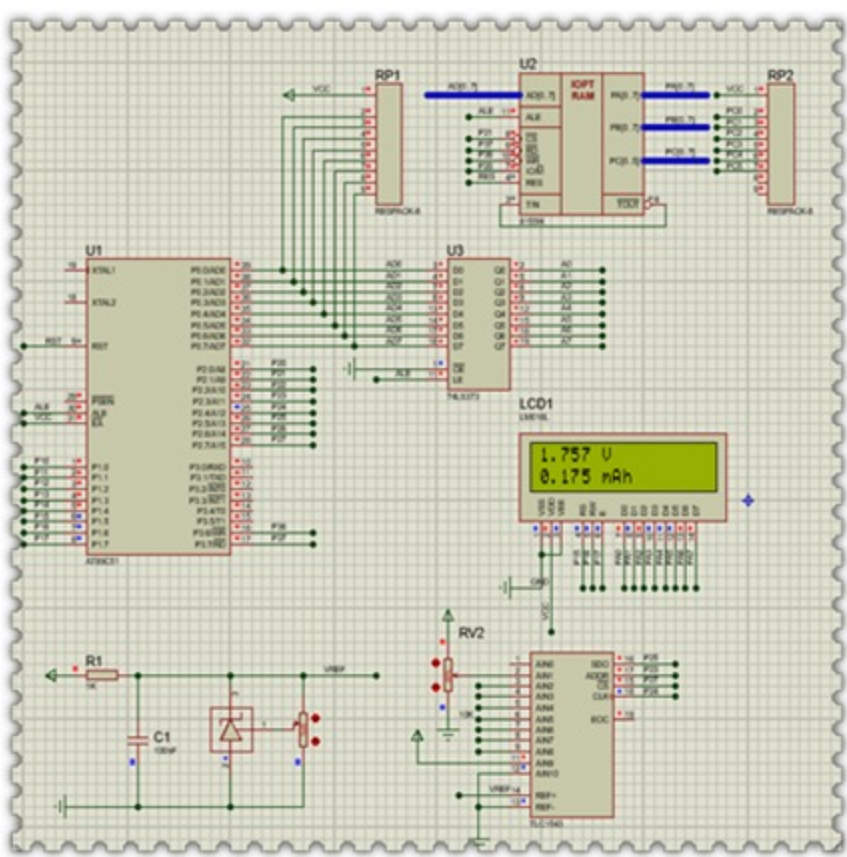

keil_v1.2



protues




开发资料



软件教程



注意事项



仿真.png



配套资料说明.txt