




```

1  #include <reg52.h>
2  #define uchar unsigned char
3  #define uint unsigned int
4
5  uchar Mode=1,Model=0;
6  uchar t;
7
8  sbit s1=P1^0;
9  sbit s2=P1^2;
10 sbit s3=P1^1;
11
12 bit alarm=1,kai=1;
13
14 sbit LR=P2^0;//红灯报警灯
15 sbit LY=P2^2;//布防灯
16 sbit LG=P2^1;//红外信号检测灯
17
18 sbit Feng=P1^3;//蜂鸣器报警
19 sbit HR=P0^3;//红外模块接入端口
20
21 void delay(uint x) //毫秒级延时函数
22 {
23     uint i,j;
24     for(i=x;i>0;i--)
25         for(j=110;j>0;j--);
26 }
27
28 void di()
29 {
30     LR=0;//蜂鸣器报警，红灯跟随闪烁
31     Feng=0;
32     delay(80);
33     LR=1;

```

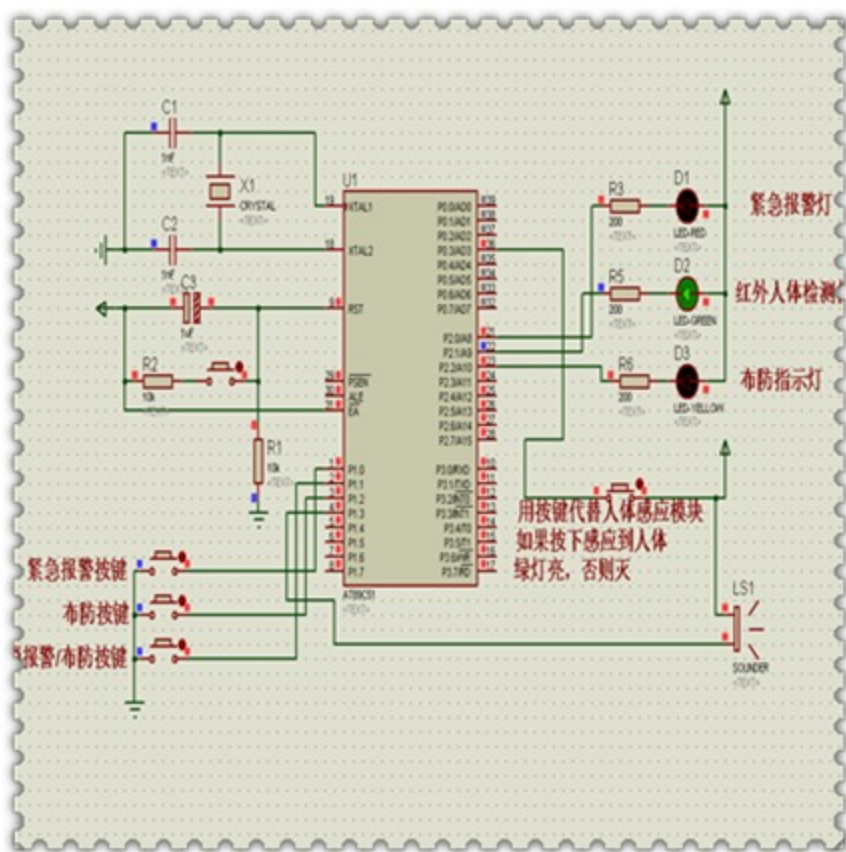

程序代码



仿真




开发资料



软件教程



注意事项



仿真图 (1).png



配套资料说明.txt