




```

1  #include<reg52.h>
2  #define uint unsigned int
3  #define uchar unsigned char
4  sbit br=P2^0; //总开关
5  sbit su=P2^1; //逐渐熄灭
6  sbit in=P2^2; //逐渐增高
7  sbit pu=P1^7; //脉冲触发
8  uint m,n,z,f; //定义变量
9  void delay_18ms(uint t) //消抖延时，延时为15ms，精度为0us
10 {
11     uint a,b;
12     for(;t>0;t--)
13         for(b=122;b>0;b--)
14             for(a=2;a>0;a--);
15 }
16 void delay_80us(uint t) //脉冲宽度为80us，精度为0us
17 {
18     unsigned char a;
19     for(;t>0;t--)
20         for(a=2;a>0;a--);
21 }
22 void main(void)
23 {
24     f=0; //初始化
25     pu=1;
26     TMOD=0x02; //定时器方式2

```

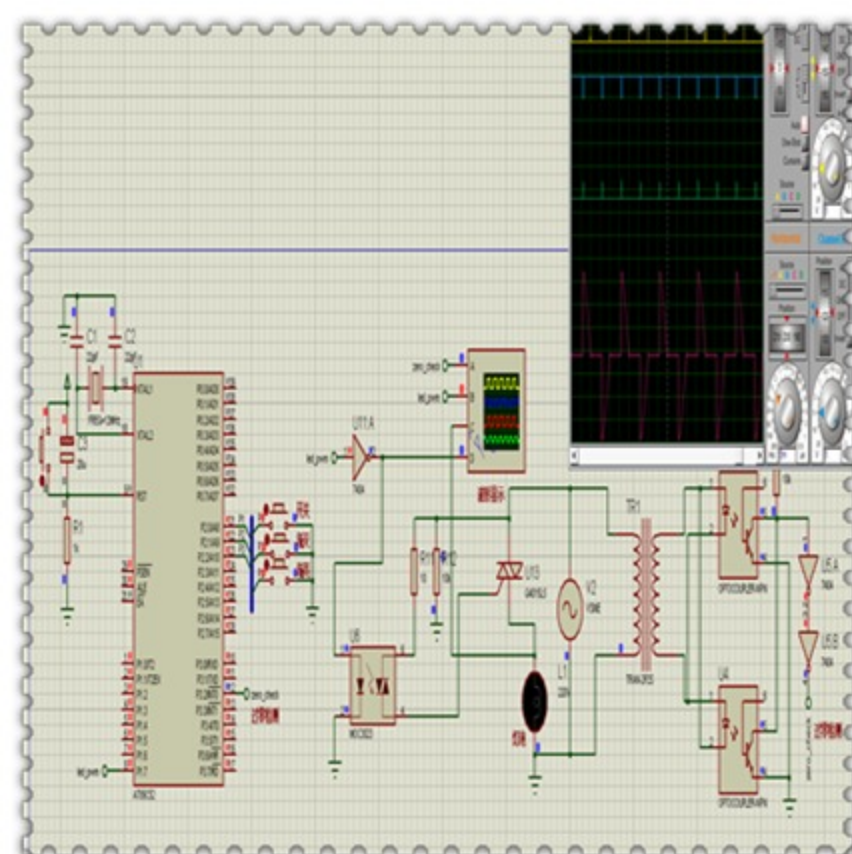

参考资料



程序(核心文件)



仿真(核心文件)



开发资料



软件教程



注意事项



仿真.png



配套资料说明.txt



元器件清单.csv



原理图.pdf