



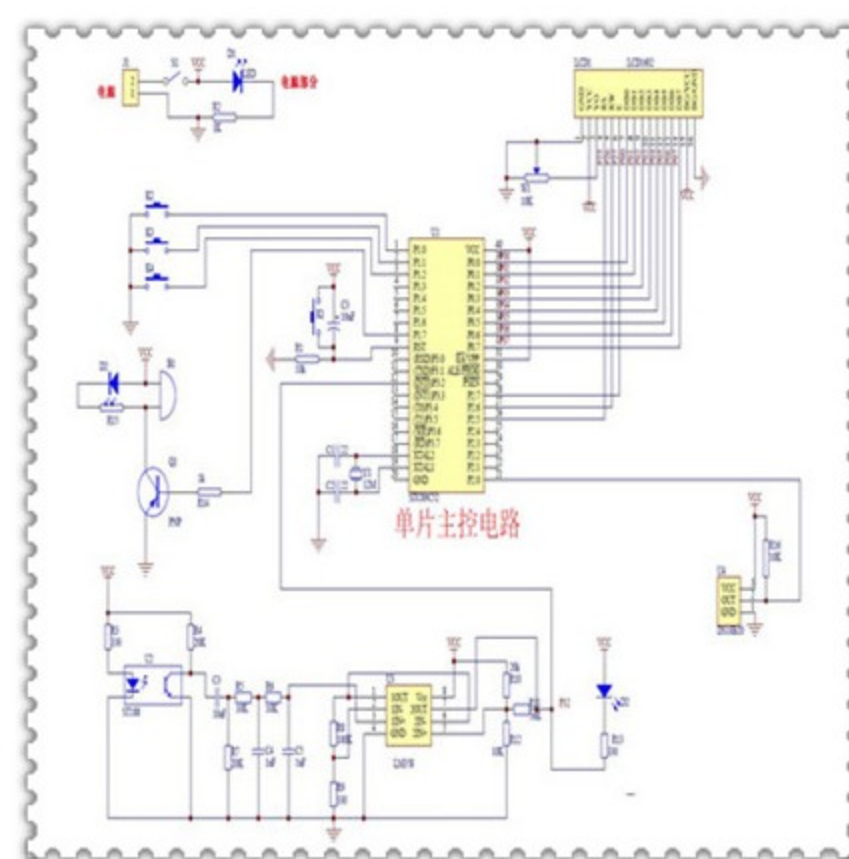

```
1  #include <reg52.h> /* 调用单片机头文件 */
2  #define uchar unsigned char /* 无符号字符型 宏定义 变量范围0~255 */
3  #define uint unsigned int /* 无符号整型 宏定义 变量范围0~65535 */
4  #include <DS18B02.h>
5  #include <intrins.h>
6  #include "eeprom52.h"
7
8
9  #define DBPort P0
10
11 unsigned char i = 0, timecount = 0, displayOK = 0, rate = 0, rate1 = 0, aa = 0, time1 = 0, flat300ms = 0;
12 unsigned int time[6] = { 0 };
13 unsigned int oneminte = 0;
14 unsigned int ReadTempDate;
15 unsigned char S_temp_H, S_temp_L, S_heart_H, S_heart_L;
16 unsigned char yemian = 0, biaozi = 0;
17
18
19 sbit K1 = P1 ^ 0; /* 菜单 */
20 sbit K2 = P1 ^ 1; /* 加 */
21 sbit K3 = P1 ^ 2; /* 减 */
22 sbit Buzzer = P1 ^ 7; /* 控制端 */
23
24
25 sbit rs = P2 ^ 5;
26 sbit rw = P2 ^ 6;
27 sbit ep = P2 ^ 7;
```

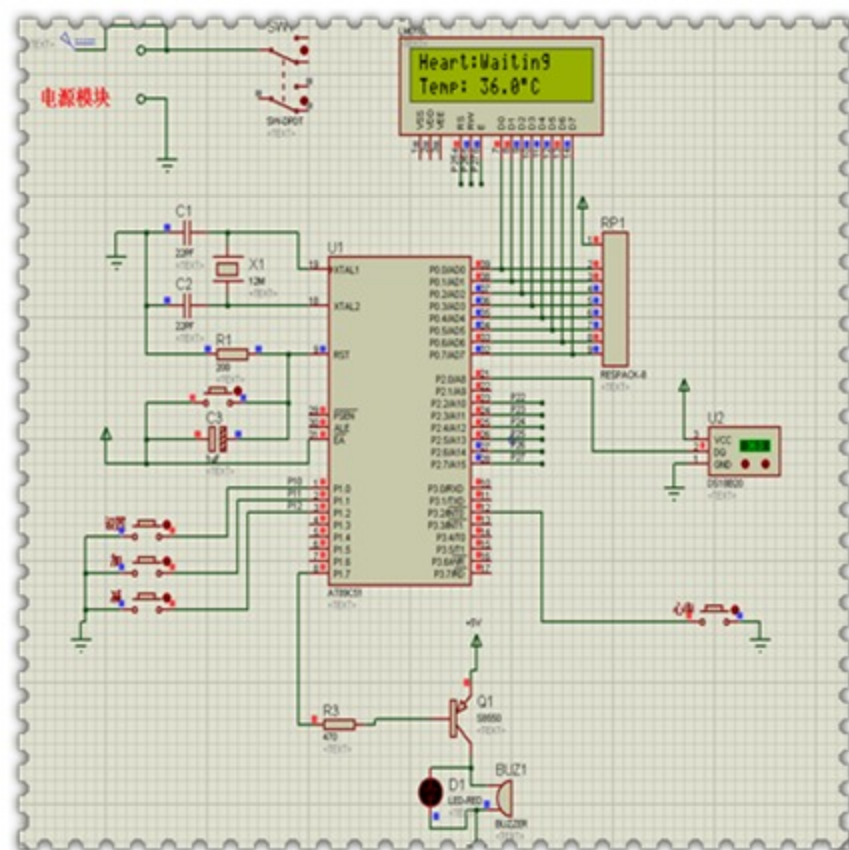