




```

1  #include<reg52.h>
2  #define uchar unsigned char
3  #define uint unsigned int
4
5  uint temp,ge,shi,bai,qian,wan,shiwan,tt;
6
7  sbit clock=P3^3;    //定义时钟信号的端口
8  uchar code table[]={0x3f,0x06,0x5b,0x4f,0x66,0x6d,0x7d,0x07,0x7f,0x6f}; //共阴数码管的编码
9
10 void delay(uint z) //延时函数
11 {
12     uint x,y;
13     for(x=z;x>0;x--)
14         for(y=110;y>0;y--);
15 }
16
17 void init() //初始化函数
18 {
19     tt=0;    //初始化刷新液晶的时间
20     TMOD=0x90; //定时器T1工作在方式1，门控位为1
21     TH1=0;    //装入初值
22     TL1=0;
23 }
24
25 void display(uint ge,uint shi,uint bai,uint qian,uint wan,uint shiwan) //数码管显示函数
26 {
27     P2=0xfe;    //位选，后同
28     P0=table[shiwan]; //段选，后同
29     delay(2);

```

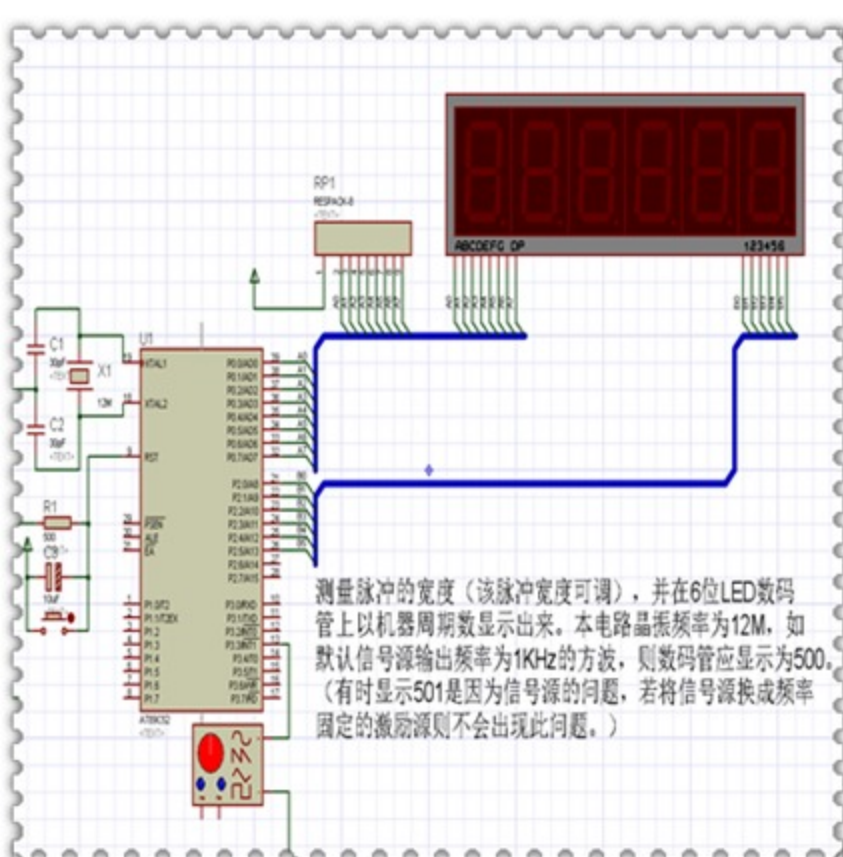

参考报告



程序（核心文件）



仿真（核心文件）




开发资料



软件教程



注意事项



仿真.png



配套资料说明.txt