


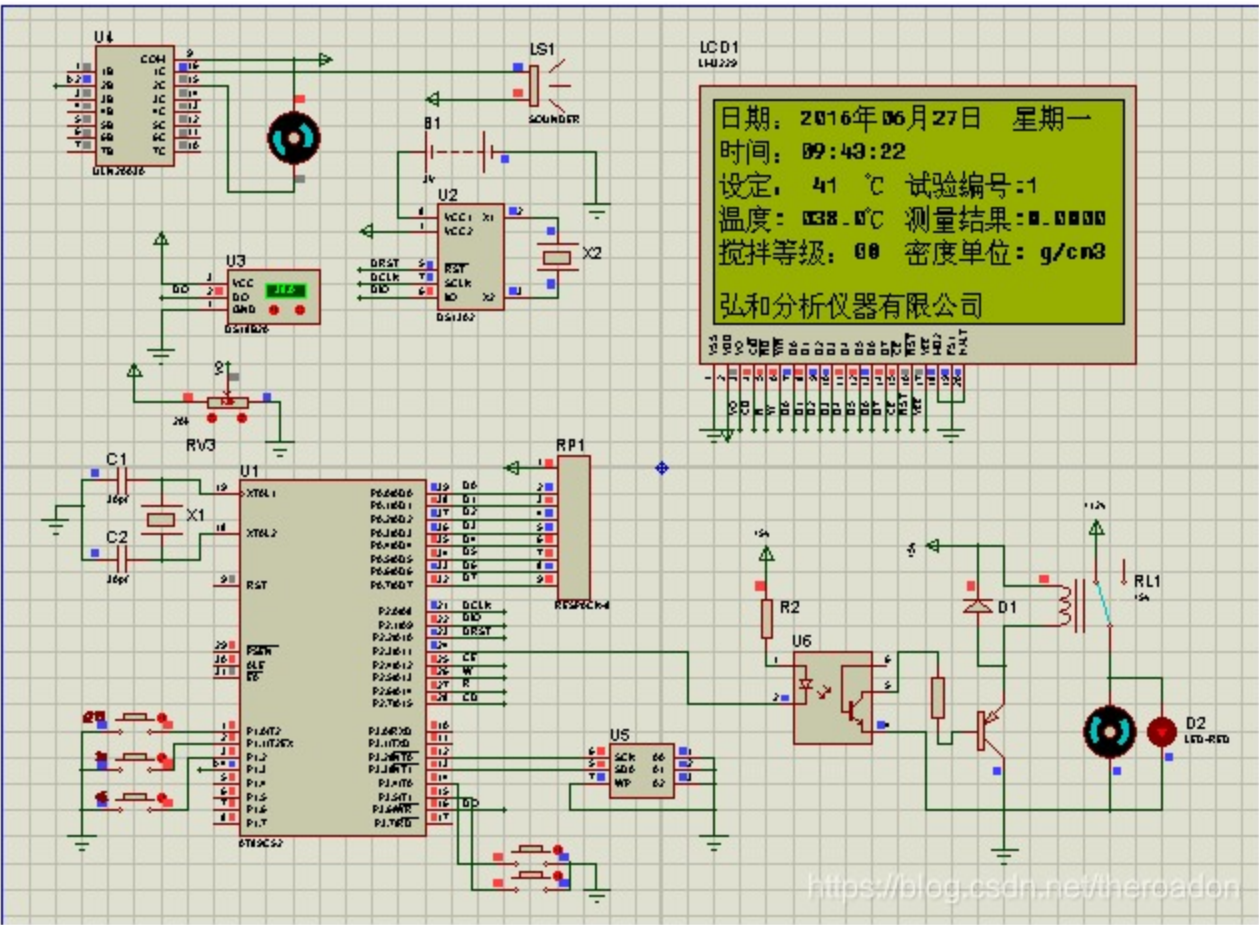


日期: 2016年06月27日 星期一
时间: 09:43:22
设定: 41 °C 试验编号: 1
温度: 38.0°C 测量结果: 0.0000
搅拌等级: 00 密度单位: g/cm3
弘和分析仪器有限公司

<https://blog.csdn.net/ineeroder>

```
1 #include"delay.h"
2 #include"ds1302.h"
3 #include"key.h"
4 #include"24c02.h"
5 #include"draw.h"
6
7 unsigned char PWM_ON; //定义速度等级
8 #define CYCLE 10 //周期
9
10
11 unsigned int TempH,TempL,temp;//温度相关参数
12
13 unsigned char tab_wendu[6];
14 //unsigned char K;
15 unsigned char L;
16 uchar flag=0;
17 bit write=0;
18 uchar mstcnt=0;
19 bit outflag;
20
21 sbit out=P2^3; //定义继电器输出端口
22 sbit DCOUT = P1^3;//定义电机信号输出端口
23 sbit k1=P3^4;
24 sbit k2=P3^5;
25
26 //显示日期时间
27 void display_time(void)
28 {
29     uchar i;
30     //年
31     Display8x16(0,8,time_buf1[1]/10+0x30);
32     Display8x16(0,9,time_buf1[1]%10+0x30);
33     //月
34     Display8x16(0,12,time_buf1[2]/10+0x30);
35     Display8x16(0,13,time_buf1[2]%10+0x30);
36     //日
37     Display8x16(0,16,time_buf1[3]/10+0x30);
38     Display8x16(0,17,time_buf1[3]%10+0x30);
39     //时
40     if(flag==2)
41     {
42         i++;
43         if(i>=6)
44             i=0;
45         if(i<3)
46         {
47             Display8x16(20,6,0xff);
48             Display8x16(20,7,0xff);
49         }
50         else
51         {
52             Display8x16(20,6,time_buf1[4]/10+0x30);
53             Display8x16(20,7,time_buf1[4]%10+0x30);
54         }
55     }
56     else
57     {
58         Display8x16(20,6,time_buf1[4]/10+0x30);
59         Display8x16(20,7,time_buf1[4]%10+0x30);
60     }
61     //分
62     if(flag==1)
63     {
64         i++;
65         if(i>=6)
66             i=0;
67         if(i<3)
```

复制



仿真程序



开发资料



软件教程



注意事项



仿真.png



温度设定仿真.DSN