


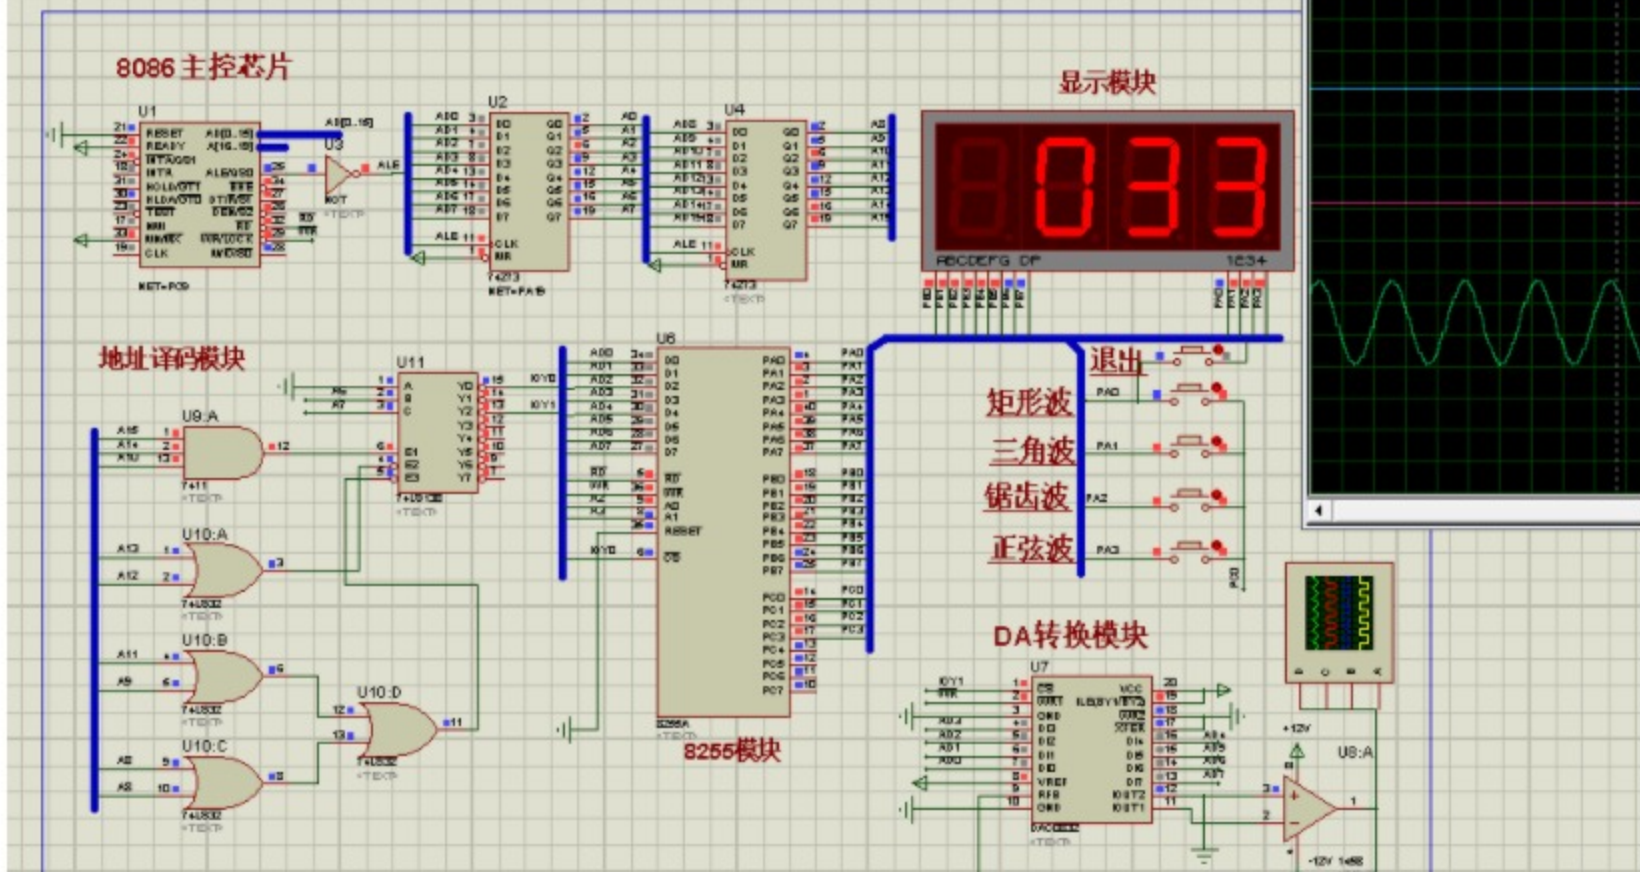

1	IOY0 EQU 0C400H	;片选IOY0对应的端口始地址
2	IOY1 EQU 0C440H	;片选IOY0对应的端口始地址
3	;*****	
4	MY8255_A EQU IOY0+00H*4	;8255的A口地址
5	MY8255_B EQU IOY0+01H*4	;8255的B口地址
6	MY8255_C EQU IOY0+02H*4	;8255的C口地址
7	MY8255_MODE EQU IOY0+03H*4	;8255的控制寄存器地址
8	DA0832 EQU IOY1+00H*4	;DA0832的端口地址
9		
10	STACK1 SEGMENT STACK	
11	DW 256 DUP(?)	
12	STACK1 ENDS	
13	;*****	
14	DATA SEGMENT	
15	DTABLE DB 3FH,06H,5BH,4FH,66H,6DH,7DH	;键值表, 0~F对应的7段数码管的段位值
16	DB 07H,7FH,6FH,77H,7CH,39H,5EH,79H,71H	
17	SINTAB DB 16,19,21,23,25,27,29,30,31,32,32,32	;正弦函数表
18	DB 31,30,29,27,25,23,21,19,16	
19	DB 13,11,9,7,5,3,2,1,0,0,0,1,2,3,5,7,9,11,13	
20	TRITAB DB 1,2,3,4,5,6,7,8,9,10,11,12,13,14,15	;三角函数表
21	DB 16,17,18,19,20,21,22,23,24,25,26,27,28,29,30	
22	DB 30,29,28,27,26,25,24,23,22,21,20,19,18,17,16	
23	DB 15,14,13,12,11,10,9,8,7,6,5,4,3,2,1	